

5100 Series Probes



天淳科技


CABLE LENGTH
1.524 m (5')

PACIFIC
SCIENTIFIC
OEEO

DIAMETER
4.3 mm ± 0.3 mm
(.170" ± 0.010 ")


1.831"
NOMINAL

.492" (NOMINAL)

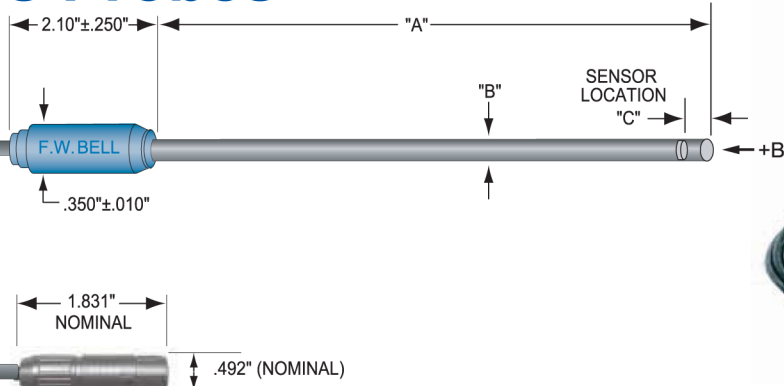

Axial Probes

Model	A ±.063"	B	C	Stem Material	Corrected Linearity	Sensitivity	Active area	Operating temp. range	Temp. stability (typical)		Frequency Response
	Zero								Calibrate		
SAD18-1902	2"	0.187" ±.003"	0.010" (NOMINAL)	RIGID PHENOLIC	0.5%/30kG	1X	0.015" DIA. (NOM)	0°C to +75°C	±0.300 Gauss / °C	-0.05% % / °C	DC to 20kHz
SAD18-1904	4"				1.0%/20kG						DC to 10kHz
SAH17-1902	2"										
SAH17-1904	4"										

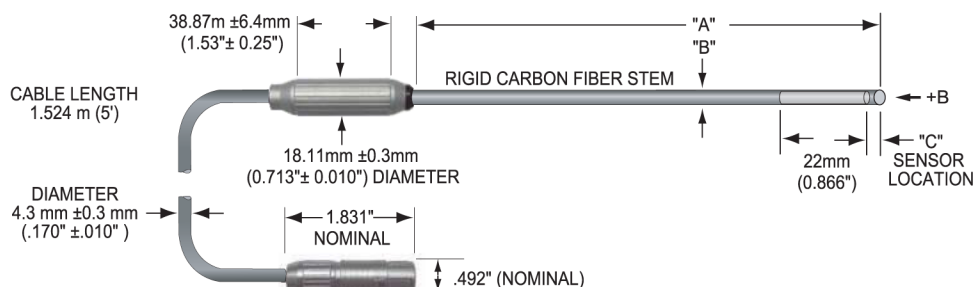

Low Field Axial Probes


Model	A $\pm .063$ "	B	C	Stem Material	Corrected Linearity	Sensitivity	Active area	Operating temp. range	Temp. stability (typical)		Frequency Response
									Zero	Calibrate	
MOS51-3204	4"	0.285 " ± 0.006 "	0.050 " (NOMINAL)	RIGID PHENOLIC	0.75%/1G	1X	0.866 " (NOM)	0°C to +75°C	± 0.02 mG/°C	-0.001 % / °C	DC to 700Hz (-3dB)

上海天淳科技有限公司

Tel : 021-5187 3517 / 6995 0169

http://www.tian-auto.com Email : sales@imeter.com.cn

5170高斯计探头购买咨询；5180高斯计探头购买咨询。

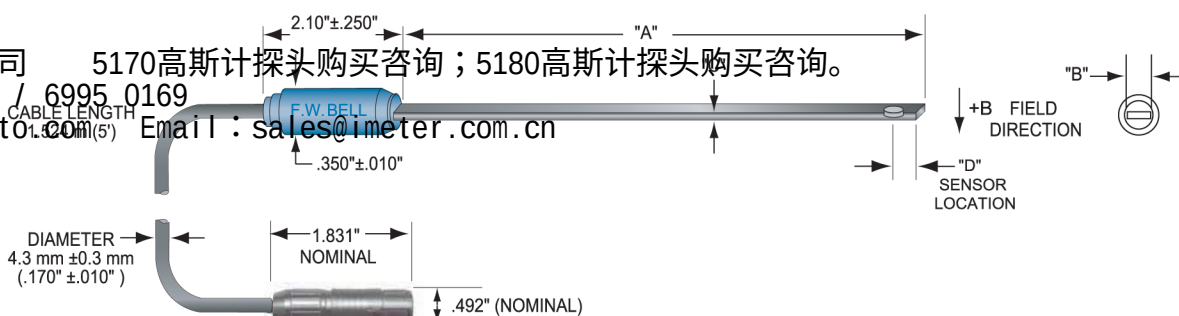

Transverse Probes

Model	A ±.063"	B	C	D	Material	Corrected Linearity	Sensitivity	Active area	Operating temp. range	Temp. stability (typical)		Frequency Response
										Zero	Calibrate	
STD18-0402	2"	0.158" ±.004"	0.045" ±.004"	0.0335" (NOMINAL)	Polypropylene	0.5%/30kG	1X	0.015" DIA. (NOM)	0°C to +75°C	±0.300 Gauss / °C (typical)	-0.05% % / °C (typical)	DC to 20kHz
STD18-0404	4"					1.0%/20kG						DC to 10kHz
STH17-0402	2"				ALUMINUM 3003 3/4 FH	1.0%/20kG						DC to 10kHz
STH17-0404	4"					0.5%/30kG						DC to 20kHz
HTH17-0604	4"	0.180" ±.004"	0.060" +.000" -.004"	0.030" (NOMINAL)	KAPTON	1.0%/20kG		0.025" DIA (NOM.)		±0.200 Gauss / °C	-0.1 % / °C	DC only
HTD18-0604	4"					0.5%/30kG						
STB1X-0201	1"	.050" ±.005"	.020" MAX			1.0%/10kG						

Note: Due to continuous process improvement, specifications subject to change without notice.

** Prior to late 2006 Transverse Probe Stems were rigid glass epoxy, .150 x .040".